




SIZES AVAILABLE			
PRODUCT CODE	THICKNESS (mm)	HEIGHT (mm)	WEIGHT per meter (T)
P100-1500DW	100	1500	0.388
P100-1500DW	100	1500	0.386
P100-1220DW	100	1220	0.315
P100-1220DW	100	1220	0.315
P100-1000DW	100	1000	0.258
P100-1000DW	100	1000	0.258
P100-0610DW	100	610	0.158
P100-0610DW	100	610	0.158

The panels are designed to be used for cladding buildings and as a retaining wall suitable for silage, root crops, grain and earth retaining.


POSSIBLE FIXING METHODS:

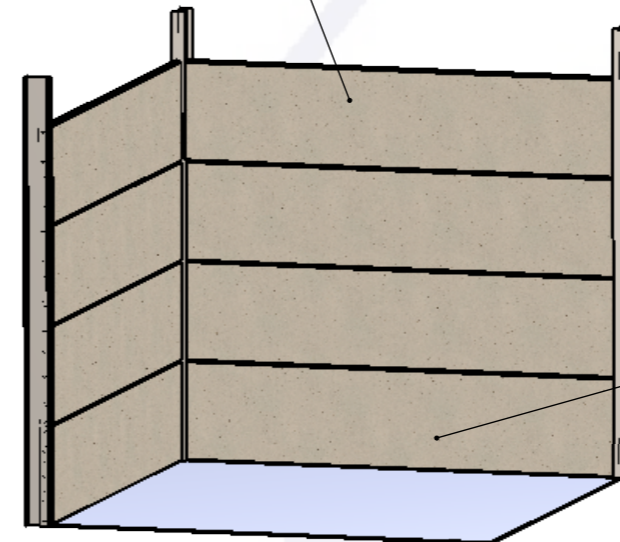

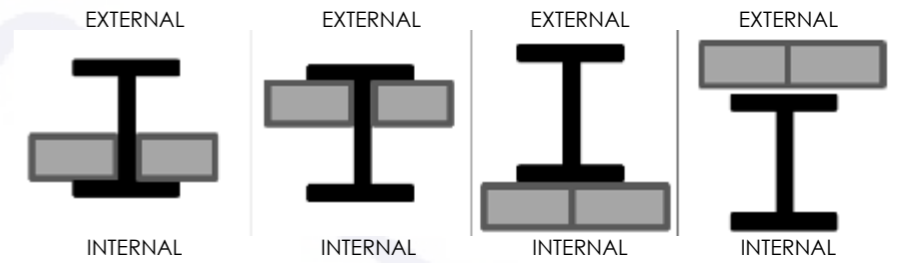

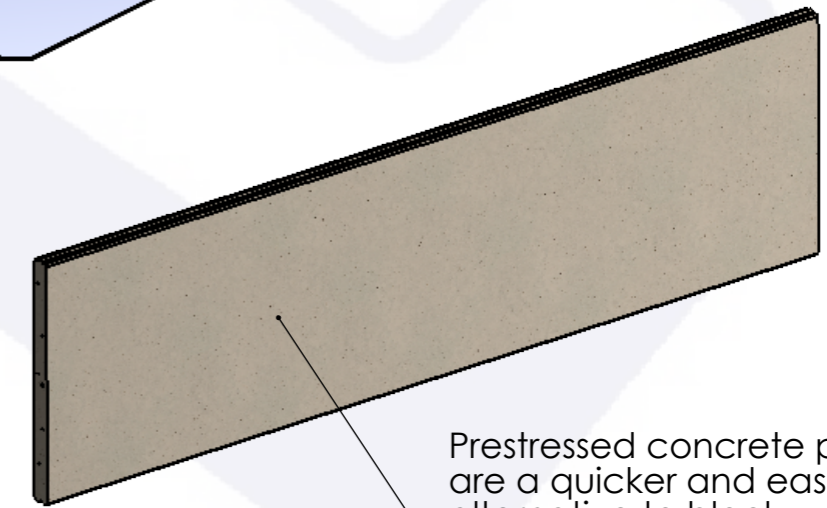Panels can be placed on top of each other for additional height.

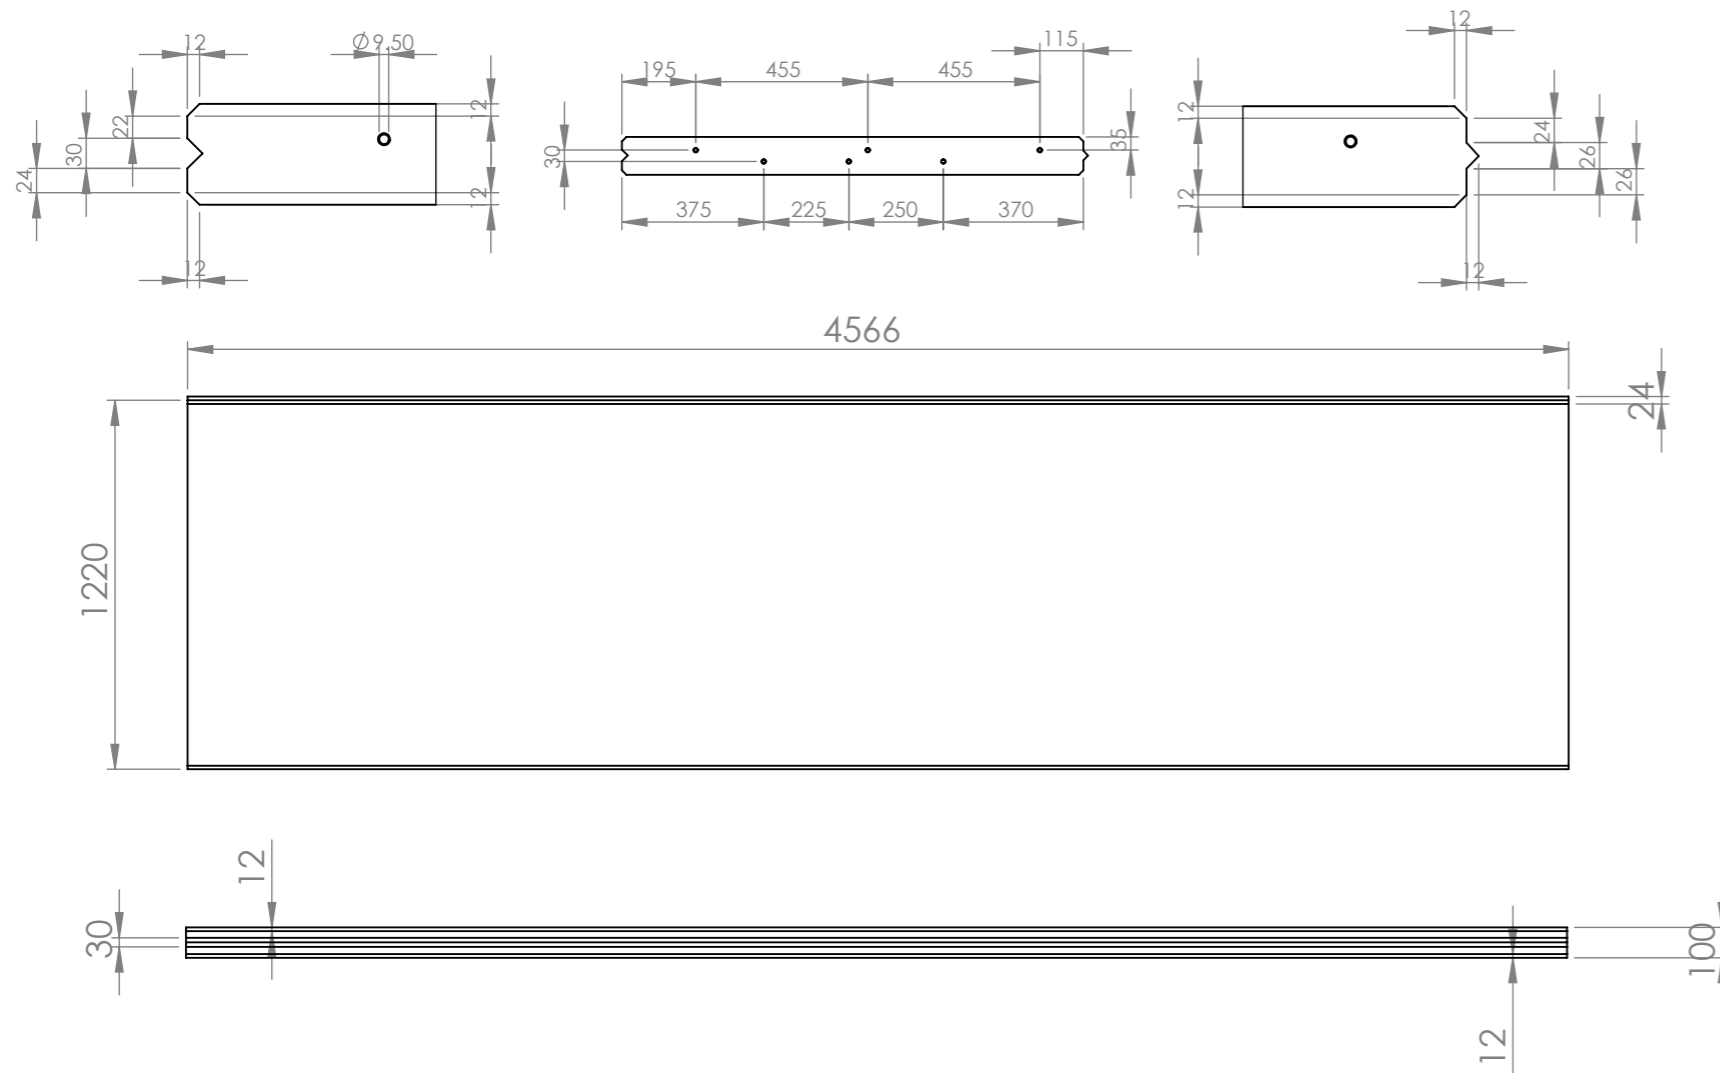

Prestressed concrete panels are a quicker and easier alternative to block work and shuttering



DO NOT SCALE DRAWING			REVISION			
		CRAVEN CONCRETE LTD Manufacture, Supply & Installation of Quality Concrete For Agriculture And Industry WWW.CRAVENCONCRETE.CO.UK				
TITLE:						
PRESTRESSED CONCRETE PANELS (4")						
DWG NO.			MATERIAL:			
P100-1220DW			CONCRETE			
ULTIMATE TENSILE STRENGTH OF STEEL: $f_{pk}=1860N/mm^2$						
TENSILE YIELD STRENGTH OF STEEL: $f_{p0.1k}=1637N/mm^2$						
COMPRESSION STRENGTH: 50N/MM ²						
TOLERANCES: +/-5mm						
NAME	SIGNATURE	DATE				
DRAWN	SAM KIRBY	13/02/18	A3	SCALE:1:50 SHEET 1 OF 1		